

R E C E S S E D

Plaster
GU10



Incassi in gesso


Plaster
recessed




Quanto proposto dalla nostra selezione "gessi" consente di illuminare al meglio lo spazio integrando la sorgente luminosa nel soffitto o nella parete in cartongesso. Questa soluzione, a scomparsa totale, unita all'impiego di lampadine GU10, garantisce un'installazione d'impatto estetico minimale e dal buon rendimento luminoso. Ogni apparecchio ha caratteristiche e peculiarità distintive e viene fornito completo di portalampade. Il prodotto consente l'accesso ed il montaggio della lampadina dalla parte frontale, semplificando al massimo sostituzioni e manutenzioni.

Our "gypsum" downlight range allow the best performance in the interior lighting. All the products could integrate the light source into ceiling or plasterboard. This product is designed as "ghost" solution. Combined with GU10 bulbs guarantee low impact installations and good light output. Each luminaires has distinctive features and peculiarities. All products include GU10 socket . Front access for easy bulb installation/ replacing. They minimize the cost for assistance and maintenance.




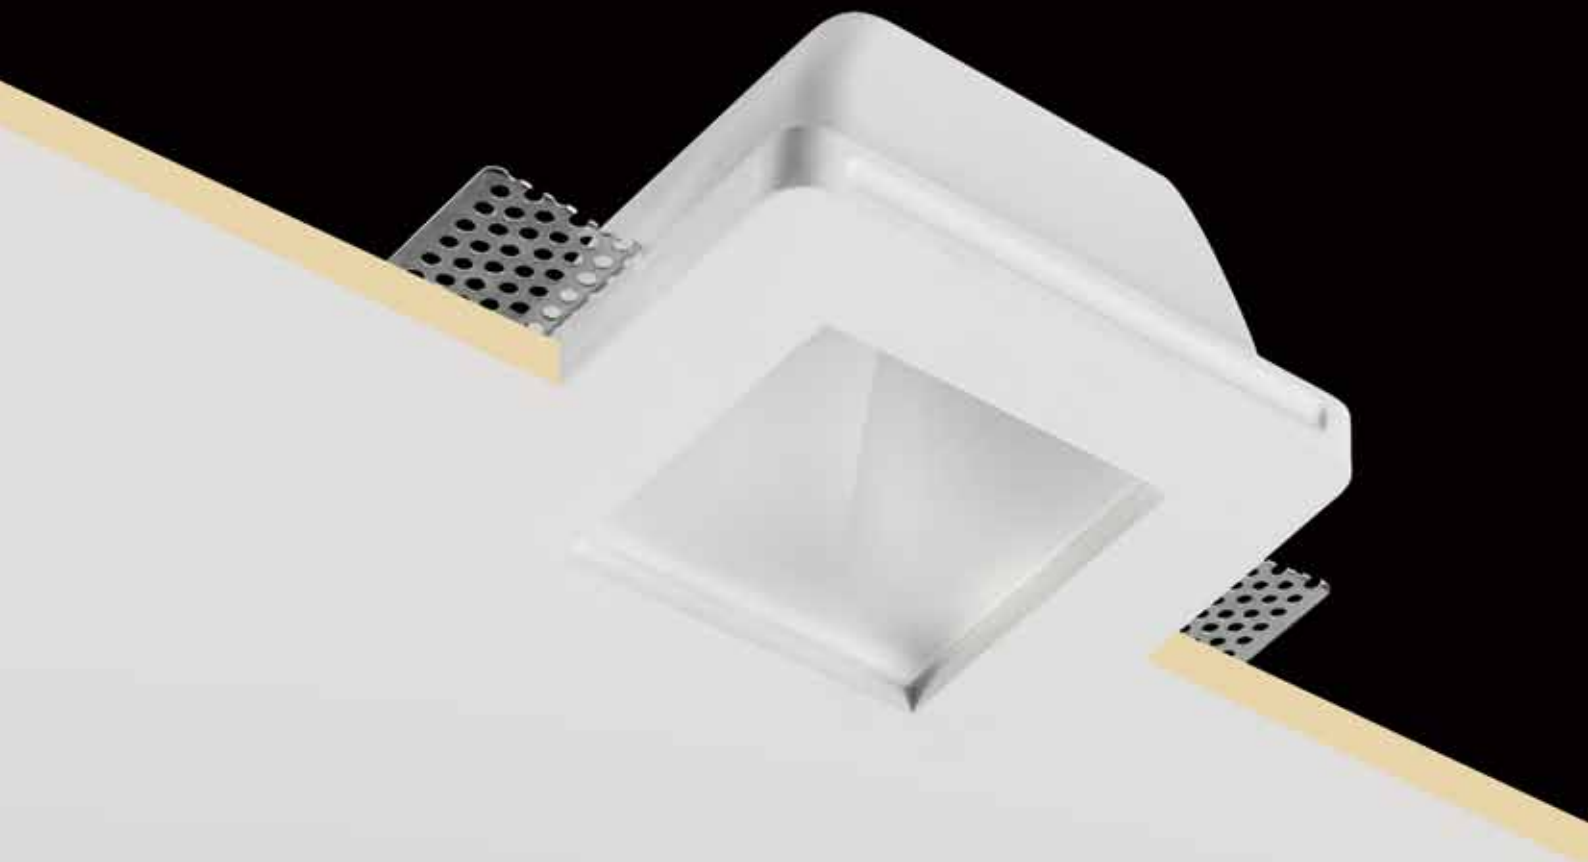

INC10010

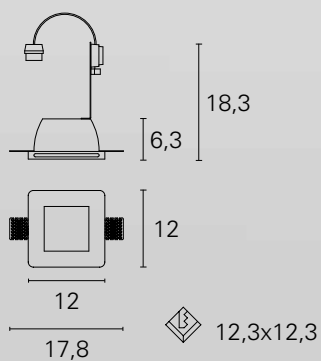

INC1500

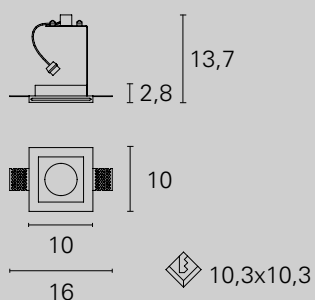

versione <i>model</i>	Downlight	Downlight
codice code	INC10010	INC1500
colore <i>finishing</i>	White	White
potenza / flusso effettivo <i>power / lumen output</i>	1x max 35W (not included)	1x max 35W (not included)
angolo emissione <i>beam angle</i>	\	\
CCT <i>CCT</i>	\	\
sorgente <i>source</i>	GU10	GU10
alimentazione <i>power feeding</i>	220÷240 Vac - class II	220÷240 Vac - class II
IP <i>IP</i>	IP20	IP20
spessore pannello min-max <i>panel thick min-max</i>	12 mm	12 mm
peso <i>weight</i>	0,8 Kg	0,4 Kg

Staffa porta lampada inclusa. / Lamp holder bracket included.

Incassi in gesso *Plaster recessed*


□ 220÷240 V GU10



Incassi in gesso *Plaster recessed*


□ 220÷240 V GU10



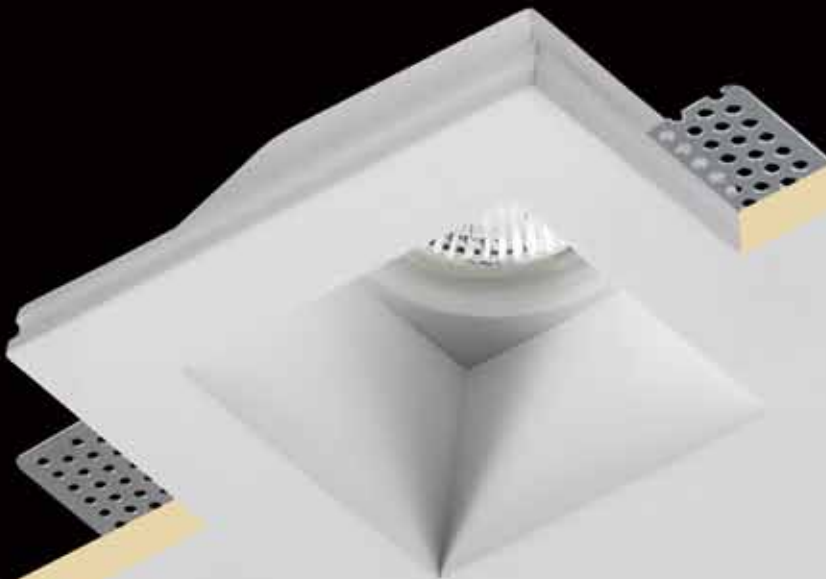


versione model	Downlight - 2x Spots	Downlight - 1x Spot
codice code	INC1503	INC1501
colore finishing	White	White
potenza / flusso effettivo power / lumen output	1x max 35W (not included)	1x max 35W (not included)
angolo emissione beam angle	\	\
CCT CCT	\	\
sorgente source	GU10	GU10
alimentazione power feeding	220÷240 Vac - class II	220÷240 Vac - class II
IP IP	IP20	IP20
spessore pannello min-max panel thick min-max	12 mm	12 mm
peso weight	1,1 Kg	0,7 Kg

INC1503

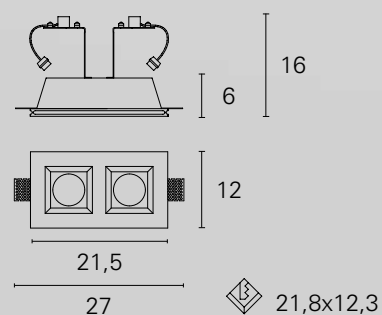

INC1501

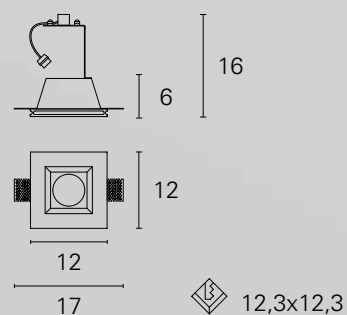


Staffa porta lampada inclusa. / Lamp holder bracket included.



versione model	Downlight - Led	Downlight - GU10	Downlight - GU10
codice code	INC10518	INC10531	INC10517
colore finishing	White	White	White
potenza / flusso effettivo power / lumen output	3W / 170 lm	1x max 35W (not included)	1x max 35W (not included)
angolo emissione beam angle	80°	\	\
CCT CCT	3000 K	\	\
sorgente source	Power LED	GU10	GU10
alimentazione power feeding	220÷240 Vac - class II	220÷240 Vac - class II	220÷240 Vac - class II
IP IP	IP20	IP20	IP20
spessore pannello min-max panel thick min-max	9-15 mm	9-15 mm	9-15 mm
peso weight	0,3 Kg	0,5 Kg	0,4 Kg

INC10518



6,5x6,5


Staffa porta lampada inclusa. / Lamp holder bracket included.

Incassi in gesso *Plaster recessed*





220÷240 V

Power Led / GU10


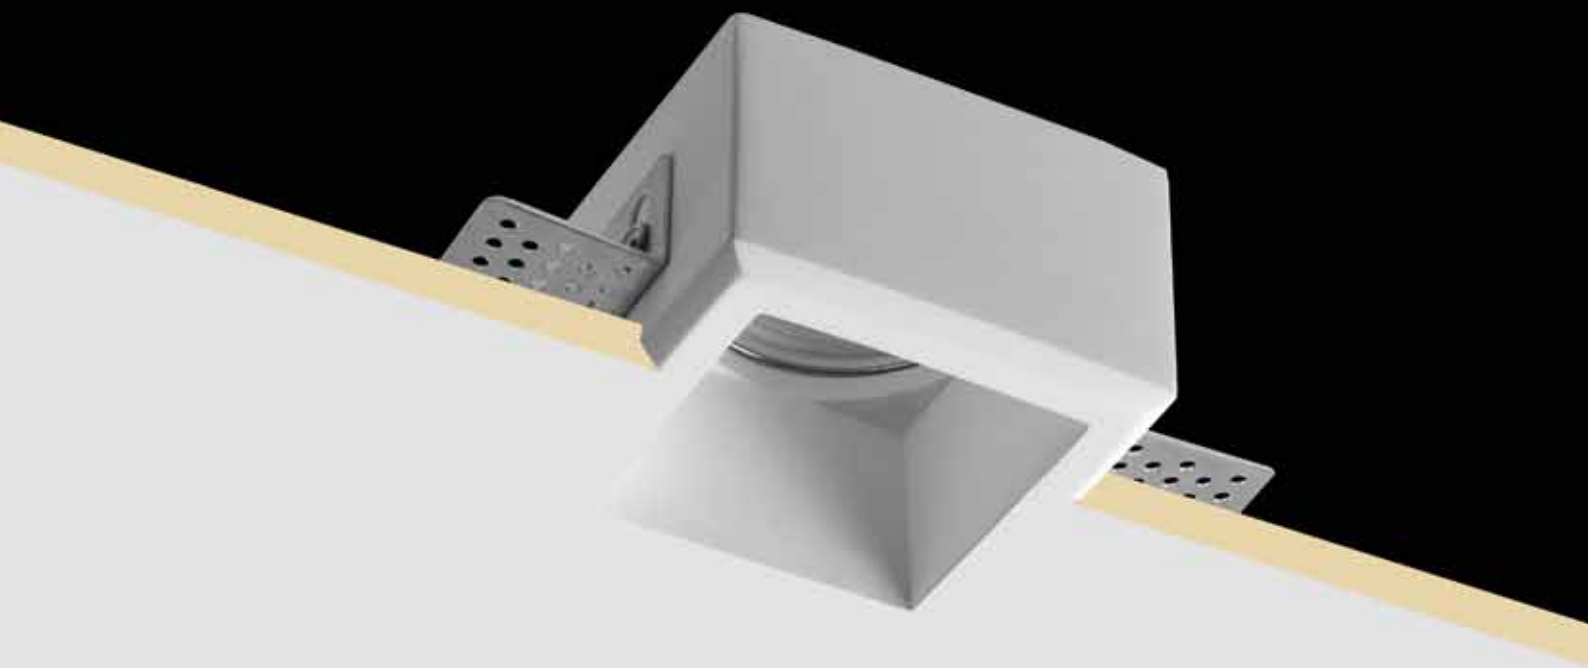



INC10531



 8,5x8,5

INC10517

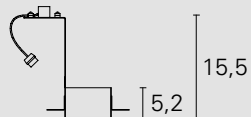

 8,7x8,7



Incassi in gesso Plaster recessed




220÷240 V

GU10




versione model	Downlight - GU10
codice code	INC10535
colore finishing	White
potenza / flusso effettivo power / lumen output	1x max 35W (not included)
angolo emissione beam angle	\
CCT CCT	\
sorgente source	GU10
alimentazione power feeding	220÷240 Vac - class II
IP IP	IP20
spessore pannello min-max panel thick min-max	9-15 mm
peso weight	0,6 Kg

INC10535

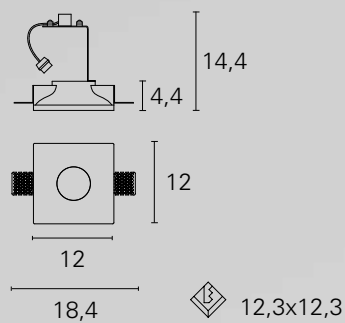


Staffa porta lampada inclusa. / Lamp holder bracket included.

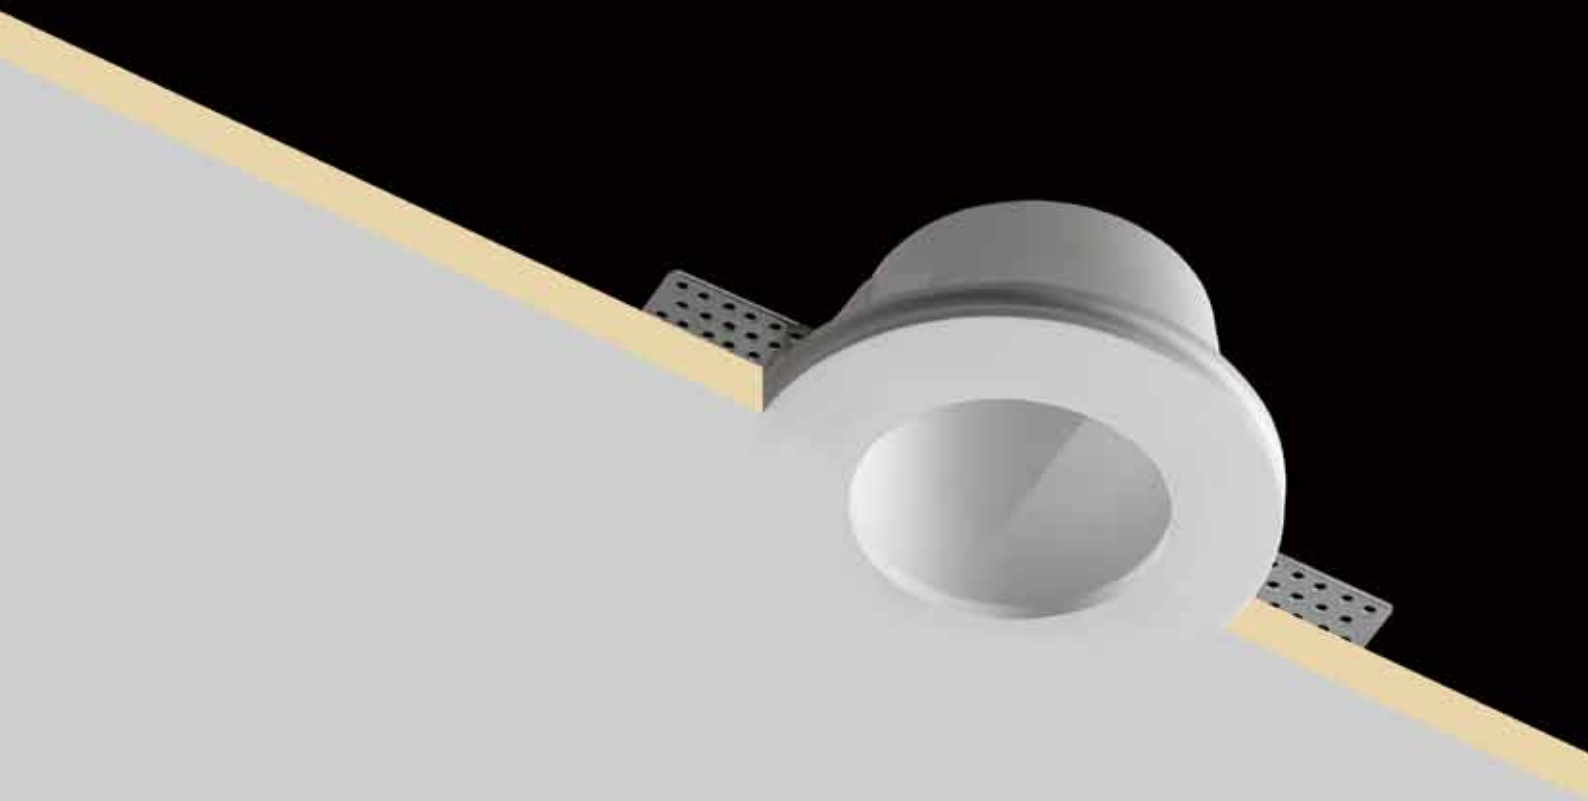

versione model	Downlight - GU10	Downlight - GU10	Downlight - GU10
codice code	INC10020	INC1508	INC1518
colore finishing	White	White	White
potenza / flusso effettivo power / lumen output	1x max 35W (not included)	1x max 35W (not included)	1x max 35W (not included)
angolo emissione beam angle	\	\	\
CCT CCT	\	\	\
sorgente source	GU10	GU10	GU10
alimentazione power feeding	220÷240 Vac - class II	220÷240 Vac - class II	220÷240 Vac - class II
IP IP	IP20	IP20	IP20
spessore pannello min-max panel thick min-max	12 mm	12 mm	12 mm
peso weight	0,6 Kg	0,4 Kg	0,4 Kg

INC10020

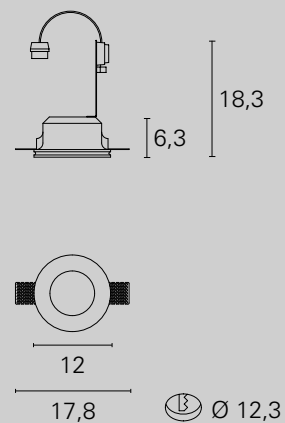


Staffa porta lampada inclusa. / Lamp holder bracket included.

Incassi in gesso *Plaster recessed*



□ 220÷240 V GU10



INC1508

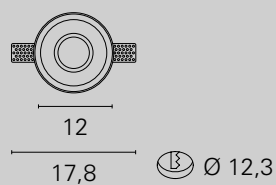

INC1518

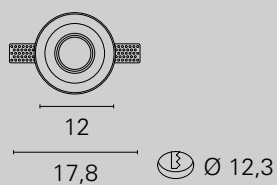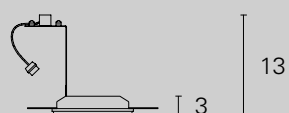




Incassi in gesso Plaster recessed

□ 220÷240 V GU10




versione model	Wall Mounting Recessed Squared	Wall Mounting Recessed Rectangular
codice code	INC1502	INC1515
colore finishing	White	White
potenza / flusso effettivo power / lumen output	1x max 35W (not included)	1x max 35W (not included)
angolo emissione beam angle	\	\
CCT CCT	\	\
sorgente source	GU10	GU10
alimentazione power feeding	220÷240 Vac - class II	220÷240 Vac - class II
IP IP	IP20	IP20
spessore pannello min-max panel thick min-max	12 mm	12 mm
peso weight	0,6 Kg	1,3 Kg

INC1502

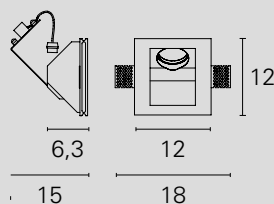

□
12,3x12,3

INC1515

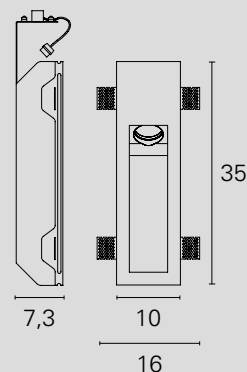

□
10,3x35,3

Staffa porta lampada inclusa. / Lamp holder bracket included.

Incassati GU10

GU10
recessed

Una serie di faretti da incasso in metallo utilizzabili nelle più disparate applicazioni. Rapidità e flessibilità d'installazione caratterizzano il successo di questa gamma. Disponibili con flusso luminoso fisso oppure orientabile, con cornice a vista oppure trimless. Corpo lampada realizzato in metallo verniciato con polveri epossidiche oppure in tornitura di alluminio. Predisposti per il montaggio di una lampadina attacco GU10 vengono forniti completi di portalampade.

Our range of recessed metal spotlights can be used in several applications. Easy and flexible installation characterize the success of these products. Available with fixed or adjustable luminous flux, visible edge or trimless. Epoxy powder painted metal body, additional versions are realized in massive aluminium. All models are designed for GU10 bulb, lamp holders included.



Incassi GU10



GU10 recessed

□ 220÷240 V



versione <i>model</i>	Downlight - GU10
codice <i>code</i>	INC00085
colore <i>finishing</i>	White
potenza / flusso effettivo <i>power / lumen output</i>	1x max 50W (not included)
angolo emissione <i>beam angle</i>	\
CCT <i>CCT</i>	\
sorgente <i>source</i>	GU10
alimentazione <i>power feeding</i>	220÷240 Vac - class II
IP <i>IP</i>	IP20
spessore pannello min-max <i>panel thick min-max</i>	\
peso <i>weight</i>	0,3 Kg

INC00085





Staffa porta lampada inclusa. / Lamp holder bracket included.



versione <i>model</i>	Downlight - GU10
codice <i>code</i>	INC00086
colore <i>finishing</i>	White
potenza / flusso effettivo <i>power / lumen output</i>	1x max 50W (not included)
angolo emissione <i>beam angle</i>	\
CCT <i>CCT</i>	\
sorgente <i>source</i>	GU10
alimentazione <i>power feeding</i>	220÷240 Vac - class II
IP <i>IP</i>	IP20
spessore pannello T min-max <i>panel thick T min-max</i>	\
peso <i>weight</i>	0,4 Kg

INC00086



9,2

15



10,5x10,5

Staffa porta lampada inclusa. / Lamp holder bracket included.

Incassi GU10

GU10 recessed

□ 220÷240 V




versione <i>model</i>	Fixed Downlight Rounded	Adjustable Downlight Rounded	Adjustable Downlight Squared
codice <i>code</i>	INC00015	INC00025	INC00035
colore <i>finishing</i>	White	White	White
potenza / flusso effettivo <i>power / lumen output</i>	1x max 50W (not included)	1x max 50W (not included)	1x max 50W (not included)
angolo emissione <i>beam angle</i>	\	\	\
CCT <i>CCT</i>	\	\	\
sorgente <i>source</i>	GU10	GU10	GU10
alimentazione <i>power feeding</i>	220÷240 Vac - class II	220÷240 Vac - class II	220÷240 Vac - class II
IP <i>IP</i>	IP20	IP20	IP20
spessore pannello min-max <i>panel thick min-max</i>	20 mm	20 mm	20 mm
peso <i>weight</i>	0,1 Kg	0,2 Kg	0,2 Kg


Staffa porta lampada inclusa. / *Lamp holder bracket included.*





INC00015 / INC0002



INC00025



INC00035 / INC0007



Fixed Downlight Rounded	Adjustable Downlight Squared
INC0002	INC0007
Aluminium	Aluminium
1x max 50W (not included)	1x max 50W (not included)
\	\
\	\
GU10	GU10
220÷240 Vac - class II	220÷240 Vac - class II
IP20	IP20
20 mm	20 mm
0,1 Kg	0,2 Kg

Colori / Colours

Aluminium




White



Incassi GU10


GU10 recessed

□ 220÷240 V

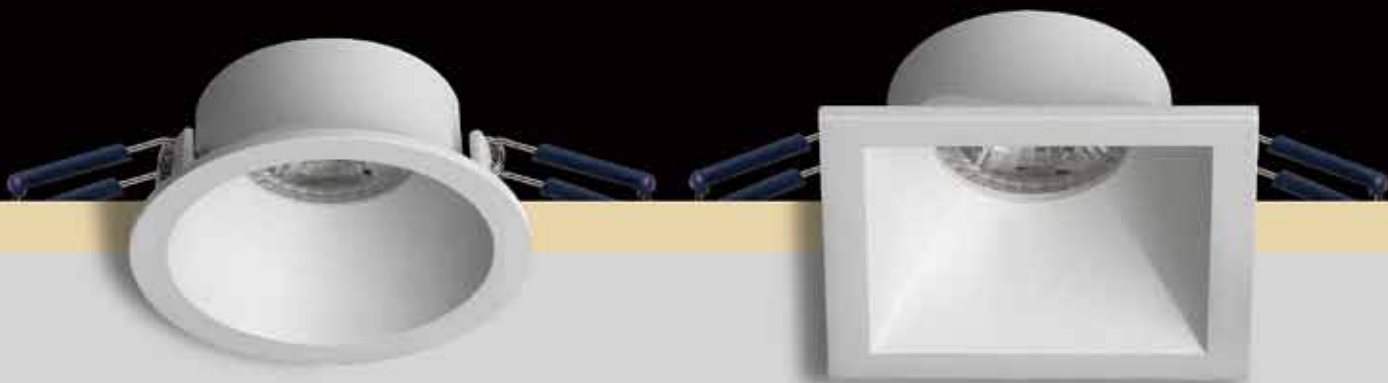


versione model	Fixed Downlight Rounded	Fixed Downlight Squared
codice code	INC00080	INC00090
colore finishing	White	White
potenza / flusso effettivo power / lumen output	1x max 50W (not included)	1x max 50W (not included)
angolo emissione beam angle	\	\
CCT CCT	\	\
sorgente source	GU10	GU10
alimentazione power feeding	220÷240 Vac - class II	220÷240 Vac - class II
IP IP	IP20	IP20
spessore pannello min-max panel thick min-max	9-20 mm	9-20 mm
peso weight	0,2 Kg	0,2 Kg

INC00080

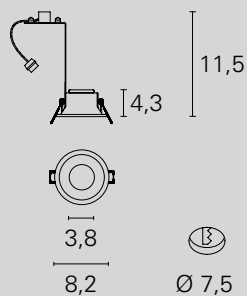

INC00090

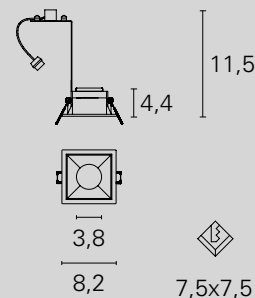


Staffa porta lampada inclusa. / Lamp holder bracket included.




Adjustable Downlight Rounded	Adjustable Downlight Squared
INC00095	INC00096
White	White
1x max 50W (not included)	1x max 50W (not included)
\	\
\	\
GU10	GU10
220÷240 Vac - class II	220÷240 Vac - class II
IP20	IP20
9-25 mm	9-25 mm
0,2 Kg	0,2 Kg

INC00095

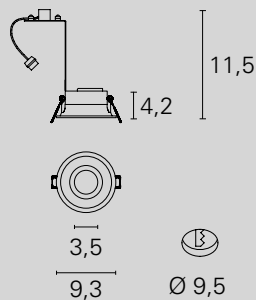

INC00096

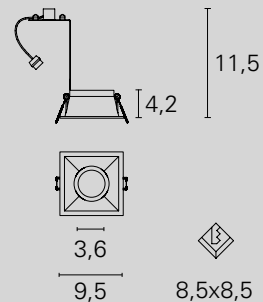

PAN

CAT61

PAN International Srl
Via G. Michelucci 1
50028 Barberino Tavarnelle
Firenze, Italy

Information
Tel. +39 055 8059336
Fax +39 055 8059338
panint@panint.it
export@panint.it

www.panint.it



8024598430621